



● **XB693**

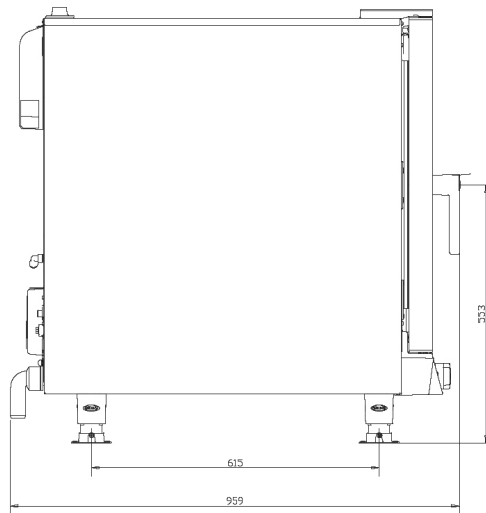

	<b>XB693</b>
Kapazität	6 600x400
Abstand	80 mm
Frequenz	50 / 60 Hz
Spannung	400 V~ 3N
Anschlusswert	10.3 Kw
Abmessungen	860x900x930
Gewicht	80 Kg

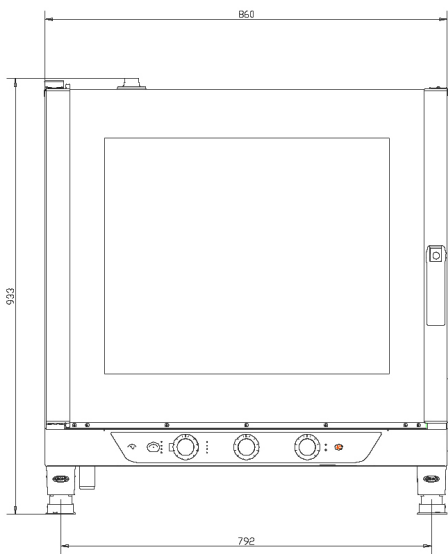

	Dynamic	Manual
<b>BAKING MODES</b>		
Convection baking 30 °C - 260 °C	•	•
Convection baking + Humidity 48 °C a 260 °C	•	•
Maximum pre-heating temperature 260 °C	•	•
<b>AIR DISTRIBUTION IN THE BAKING CHAMBER</b>		
AIR.Plus technology: multiple fans with reversing gear	•	•
AIR.Plus technology: dual fan speeds	•	•
<b>CLIMA MANAGEMENT IN THE BAKING CHAMBER</b>		
DRY.Plus technology: rapid humidity extraction	•	•
STEAM.Plus technology: humidity setting from 20 to 100%, programmable by the user	•	-
STEAM.Plus technology: manual humidity activation	-	•
<b>PATENTED DOOR</b>		
Door hinges made of high durability and self-lubricating techno-polymer	•	•
Reversible door, even after the installation	•	•
Door docking positions at 60°-120°-180°	•	•
<b>AUXILIARIES FUNCTIONS</b>		
99 baking programs memory, each one made of 3 baking steps + pre-heating	•	-
Protek.SAFE™ technology: maximum thermal efficiency and working safety (cold door glass and external surfaces)	•	•
Visualisation of the residual baking time	•	•
Continuous functioning «INF»	•	•
Visualisation of the nominal value of baking chamber temperature	•	-
«COOL» function for rapid chamber cooling	•	-
Temperature unity settable in °C or °F	•	-
<b>TECHNICAL DETAILS</b>		
Rounded stainless steel (DIN 1.4301) cavity for hygiene and ease of cleaning	•	•
Cavity lighting through long-life halogen lights	•	•
High-durability carbon fibre door lock	•	•
Openable internal glass to simplify the door cleaning	•	•
Stainless steel L-shaped rack rails	•	•
Light weight – heavy duty structure using innovative materials	•	•
Autodiagnosys system for problems or brake down	•	-
USB and LAN port	•	-
Safety temperature switch	•	•