
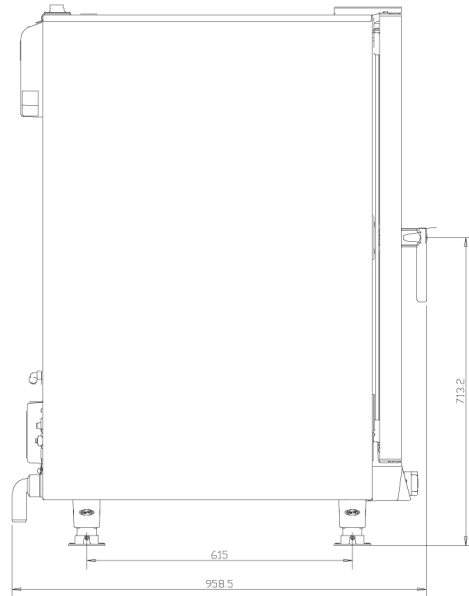


● XV893


	XV893
Kapazität	12 GN 1/1
Abstand	67 mm
Frequenz	50 / 60 Hz
Spannung	400 V~ 3N
Anschlusswert	15,8 kW
Abmessungen	860x900x1250
Gewicht	112 Kg

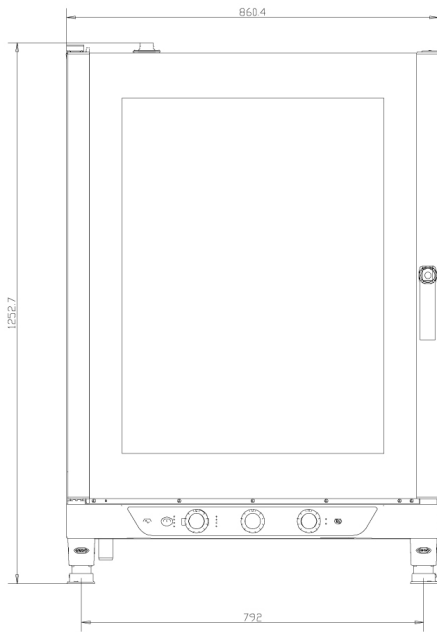

COOKING MODES

Convection cooking 30 °C - 260 °C

Convection cooking + Humidity 48 °C - 260 °C

Maximum pre-heating temperature 260° C

-
-
-

AIR DISTRIBUTION IN THE COOKING CHAMBER

AIR.Plus technology: multiple fans with reversing gear

AIR.Plus technology: dual fan speeds

-
-

CLIMA MANAGEMENT IN THE COOKING CHAMBER

DRY.Plus technology: rapid humidity extraction

STEAM.Plus technology: manual humidity activation

-
-

PATENTED DOOR

Door hinges made of high durability and self-lubricating techno-polymer

Reversible door, even after the installation

Door docking positions at 60°-120°-180°

-
-
-

AUXILIARIES FUNCTIONS

Protek.SAFE™ technology: maximum thermal efficiency and working safety (cold door glass and external surfaces)

Visualisation of the residual cooking time

Continuous functioning «INF»

-
-
-

TECHNICAL DETAILS

Rounded stainless steel (DIN 1.4301) cavity for hygiene and ease of cleaning

Cavity lighting through long-life halogen lights

High-durability carbon fibre door lock

Openable internal glass to simplify the door cleaning

Stainless steel C-shaped rack rails

Light weight – heavy duty structure using innovative materials

Safety temperature switch

-
-
-
-
-
-
-